



[Portal](#) > [Knowledgebase](#) > [GeoPro](#) > [Iridium Extreme](#) > [How-To](#) > [Registering Iridium Extreme to communicate with GeoPro](#)

Registering Iridium Extreme to communicate with GeoPro


Lu Parente - 2016-08-31 - in [How-To](#)

Follow the instructions below on how to register the Iridium Extreme to communicate with the GeoPro portal.

Note: The Iridium Extreme must be activate on a voice plan and the GeoPro LBS add-on for use with GeoPro. For further information on how to activate your Iridium Extreme with the GeoPro portal and a GeoPro LBS plan add-on, please contact our Customer Care department at 1-888-290-1616.


Solution: Register Iridium Extreme with GeoPro

1. Login to <https://geopro.globalalerting.com>
2. Navigate to the **Devices** tab and select the desired Iridium Extreme from your list of devices.

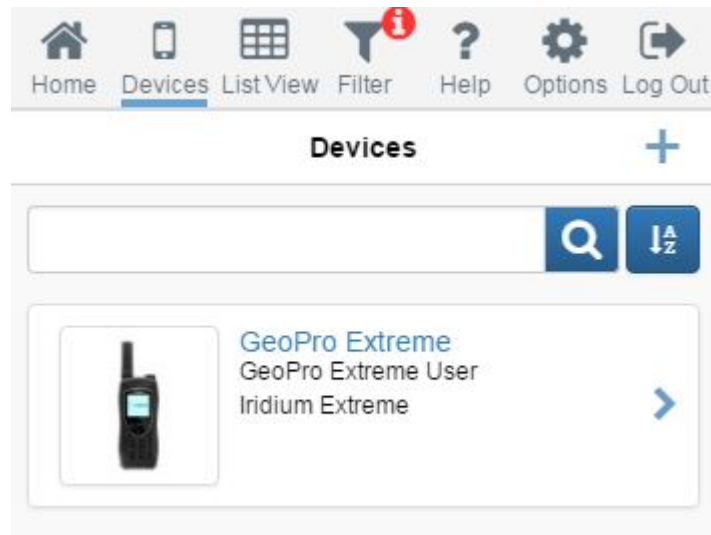


3. Select Configure followed by Advanced to view your Iridium Extreme Registration Code and PIN code.

< Devices **GeoPro Extreme**



GeoPro Extreme
GeoPro Extreme User
Iridium Extreme



GeoPro Extreme User
LP Demo PRD [Test Acct]
geopro.prd+extreme@gmail.com
February 10, 2016 4:56:31 PM

Inbox

Outbox

Conversation

Device Log

Send Text Message

Request Location

Manual Check-In

Declare Emergency

Configure

< GeoPro Extreme **Configure**

Device Details

Map Icon

External Links

Address Book

Event Notifications

Canned Messages

Check-In Schedule

Reporting Rate

Advanced

4. Your Extreme Registration Code and PIN code will be displayed. Take note of both codes.

Registration Code

60902

PIN Code

13850

5. Power on the Iridium Extreme handset and enter *#575# and press the green button.

- The IMEI and registration code will appear
- Verify the IMEI and Registration code match
- Press Register
- Enter the PIN Code from the GeoPro portal and press OK

6. Take the Iridium Extreme outside to complete the registration process.

- If the handset is powered on, power it off and back on again
- The handset will complete the registration process and you may see the GeoPro logo flash quickly on the display. This can take up to 30-60 seconds after network registration

7. The handset is now ready to be used with the GeoPro portal.